



ENDLESS KNOT

Rug Pads *and* Carpet Installation


Rug Pad | Firm Grip

100% pre-consumer
synthetic fiber
thermal-bonded to premium rubber



Rug Pad | Ultra

100% pre-consumer
synthetic fiber
thermal-bonded to premium rubber



Rug Pad | Double Stick

100% synthetic rubber



Carpet Tape

For Inset installation



endlessknotrugs.com

PO Box 259270 Madison, WI 53715 | 800-674-3424



ENDLESS KNOT

Rug pads can extend the life of your rug.

Rug Pad Firm Grip

Slip-resistant pad secures your rug firmly in place.

Synthetic fiber and rubber protect your floor under high-traffic areas or heavy furniture.

Reversible design can be used on hard-surfaces or carpet.

Thick foundation makes for luxurious added comfort.

Hypoallergenic materials can be used anywhere.

10-Year Warranty guarantees lasting protection.



Color:
Grey

Thickness:
0.300" (7.62 mm)

Material Weight:
45 oz./sq. yd



Dimensions:
Custom fit

Composition:

100% pre-consumer synthetic fiber
thermal-bonded to premium rubber

Flammability (Pill Test): Passes

Density:
12.5 lbs/ft³

R-Value:
2.12

GET YOUR OWN FIRM GRIP RUG PAD IN CUSTOM-FIT DIMENSIONS
FOR SAMPLES, EMAIL samples@endlessknotrugs.com

PO Box 259270 Madison, WI 53715 | 800-674-3424 | endlessknotrugs.com



ENDLESS KNOT

Rug pads can extend the life of your rug.

Rug Pad Ultra

They minimize wrinkles, prevent slipping accidents, and even make your carpet feel more comfortable to walk on.

That's what we call a win-win.

Slip-resistant pad
secures your rug firmly in place.

Synthetic fiber and rubber protect
your floor under high-traffic areas or heavy furniture.

Reversible design
can be used on hard-surfaces or carpet.

Thick foundation
makes for luxurious added comfort.

Hypoallergenic materials
can be used anywhere.


10-Year Warranty
guarantees lasting protection.

Color: _____
Grey

Thickness: _____
0.25" (6.35 mm)

Material Weight:
38 oz./sq. yd

 **Dimensions:**
Custom fit

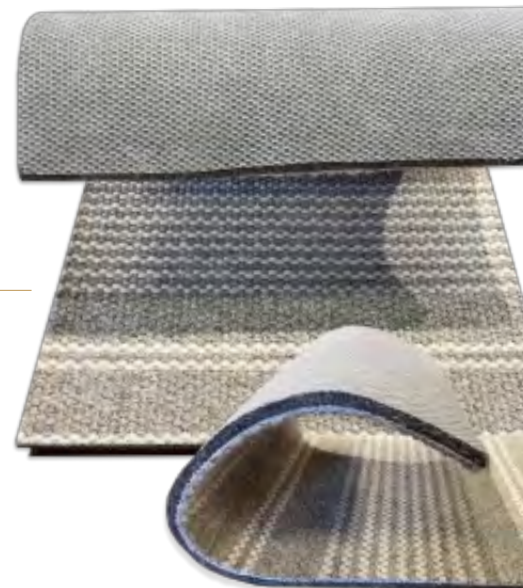

Composition:
100% pre-consumer synthetic fiber
thermal-bonded to premium rubber.

Flammability (Pill Test): Passes

Radiant Panel-Astme 648: Class 1

Density: 10.5 lbs/ft³ **R-Value:** 2.12

Roll

Width: 6'/12'

Tensile Length: 175

Length: 60'/60'

Tensile Width: 191

Weight: 190 lbs

GET YOUR OWN ULTRA NON-SKID ATTACHED CUSHION PAD

FOR SAMPLES, EMAIL samples@endlessknotrugs.com

PO Box 259270 Madison, WI 53715 | 800-674-3424 | endlessknotrugs.com



endless knot

Rug Pad Double Stick

They minimize wrinkles, prevent slipping accidents, and even make your carpet feel more comfortable to walk on.

That's what we call a win-win.

Slip-resistant pad
secures your rug firmly in place.

Synthetic fiber and rubber protect
your floor under high-traffic areas or heavy furniture.

Reversible design
can be used on hard-surfaces or carpet.

Thick foundation
makes for luxurious added comfort.

Hypoallergenic materials
can be used anywhere.

Warranty
life of the carpet

Rug pads can extend the life of your rug.

Color:
Black

Thickness:
0.25" (6.35 mm)

Material Weight:
38 oz./sq. yd



Dimensions:
54" x 30"



Composition: 100% synthetic rubber.

Traffic Class: Class II Heavy

Moisture Barrier: StainSTOP™

Flammability (Pill Test): Passes

Radiant Panel-Astme 648: N/A

Density: 22 lbs/ft³ **R-Value:** 0.460

Size: 15 YD²

Dimensions: 54" x 30"

Product Code: BV0175

Hypoallergenic: Yes

Backing Top/Bottom: Non-Woven/Polytek

Roll

GET YOUR OWN EK DOUBLE STICK CARPET PAD 2568 IN CUSTOM-FIT DIMENSIONS

FOR SAMPLES, EMAIL samples@endlessknotrugs.com

PO Box 259270 Madison, WI 53715 | 800-674-3424 | endlessknotrugs.com

Carpet Tape for Inset Installation.

Endless Knot recommends using double sided carpet tape with a fiber mesh backing for carpet or inset rug installations.

Carpet tape should be minimum 2 inches in width, and should be rated for indoor and outdoor use.

Refer to installation diagram for recommended carpet tape placement **(Figure A)**.

Carpet tape should be applied to the subfloor with the carpet rolled on top to complete the installation **(Figure B)**.



Fig. A

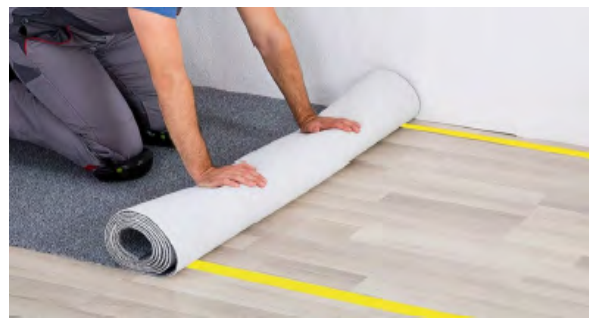


Fig. B